

# PURE GREY

纯灰

MN231B

## DESCRIPTION

干净的灰，是汲取最舒适的灰度，将自由感与秩序感完美结合。

Pure grey is the most comfortable grey, which perfectly combines the sense of freedom and rhythm.

## SPECIFICATION

Size: 1600X3200X12mm  
126" X 63" X 1/2"


耀光面 / Satin (Mat)




## ITEM NO.

MN2318Y321612

## FACE CONTINUITY

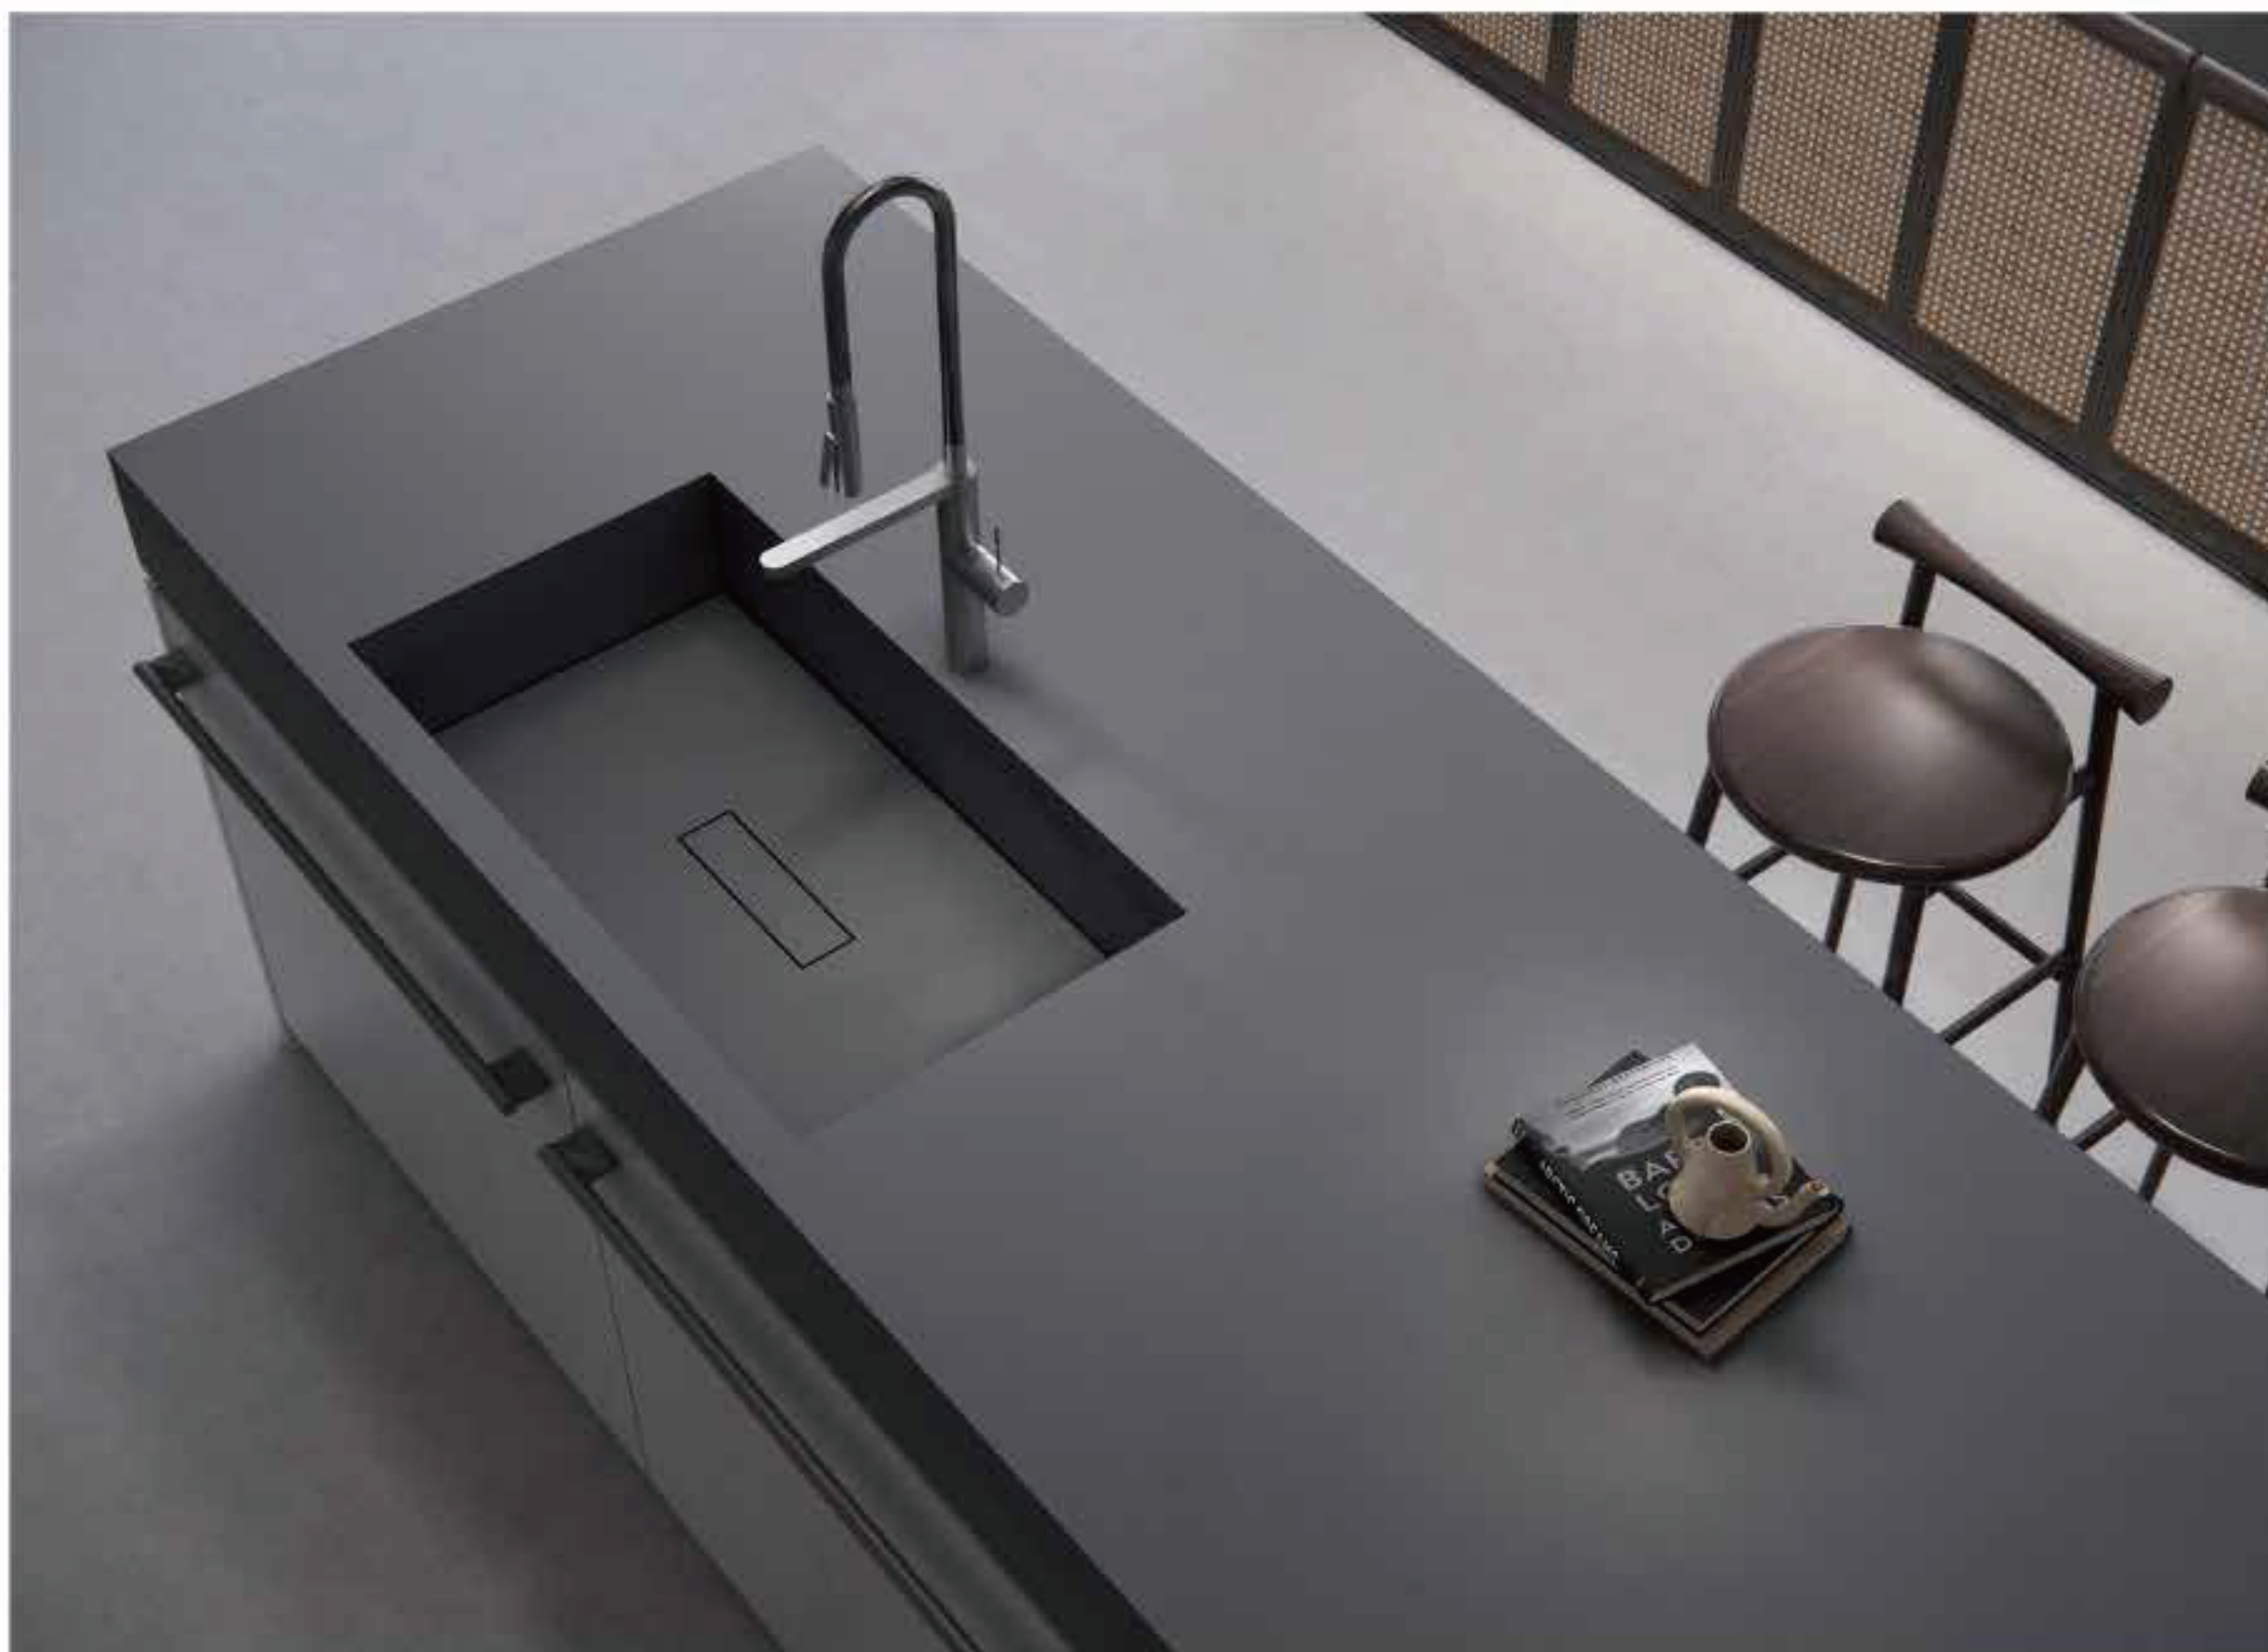

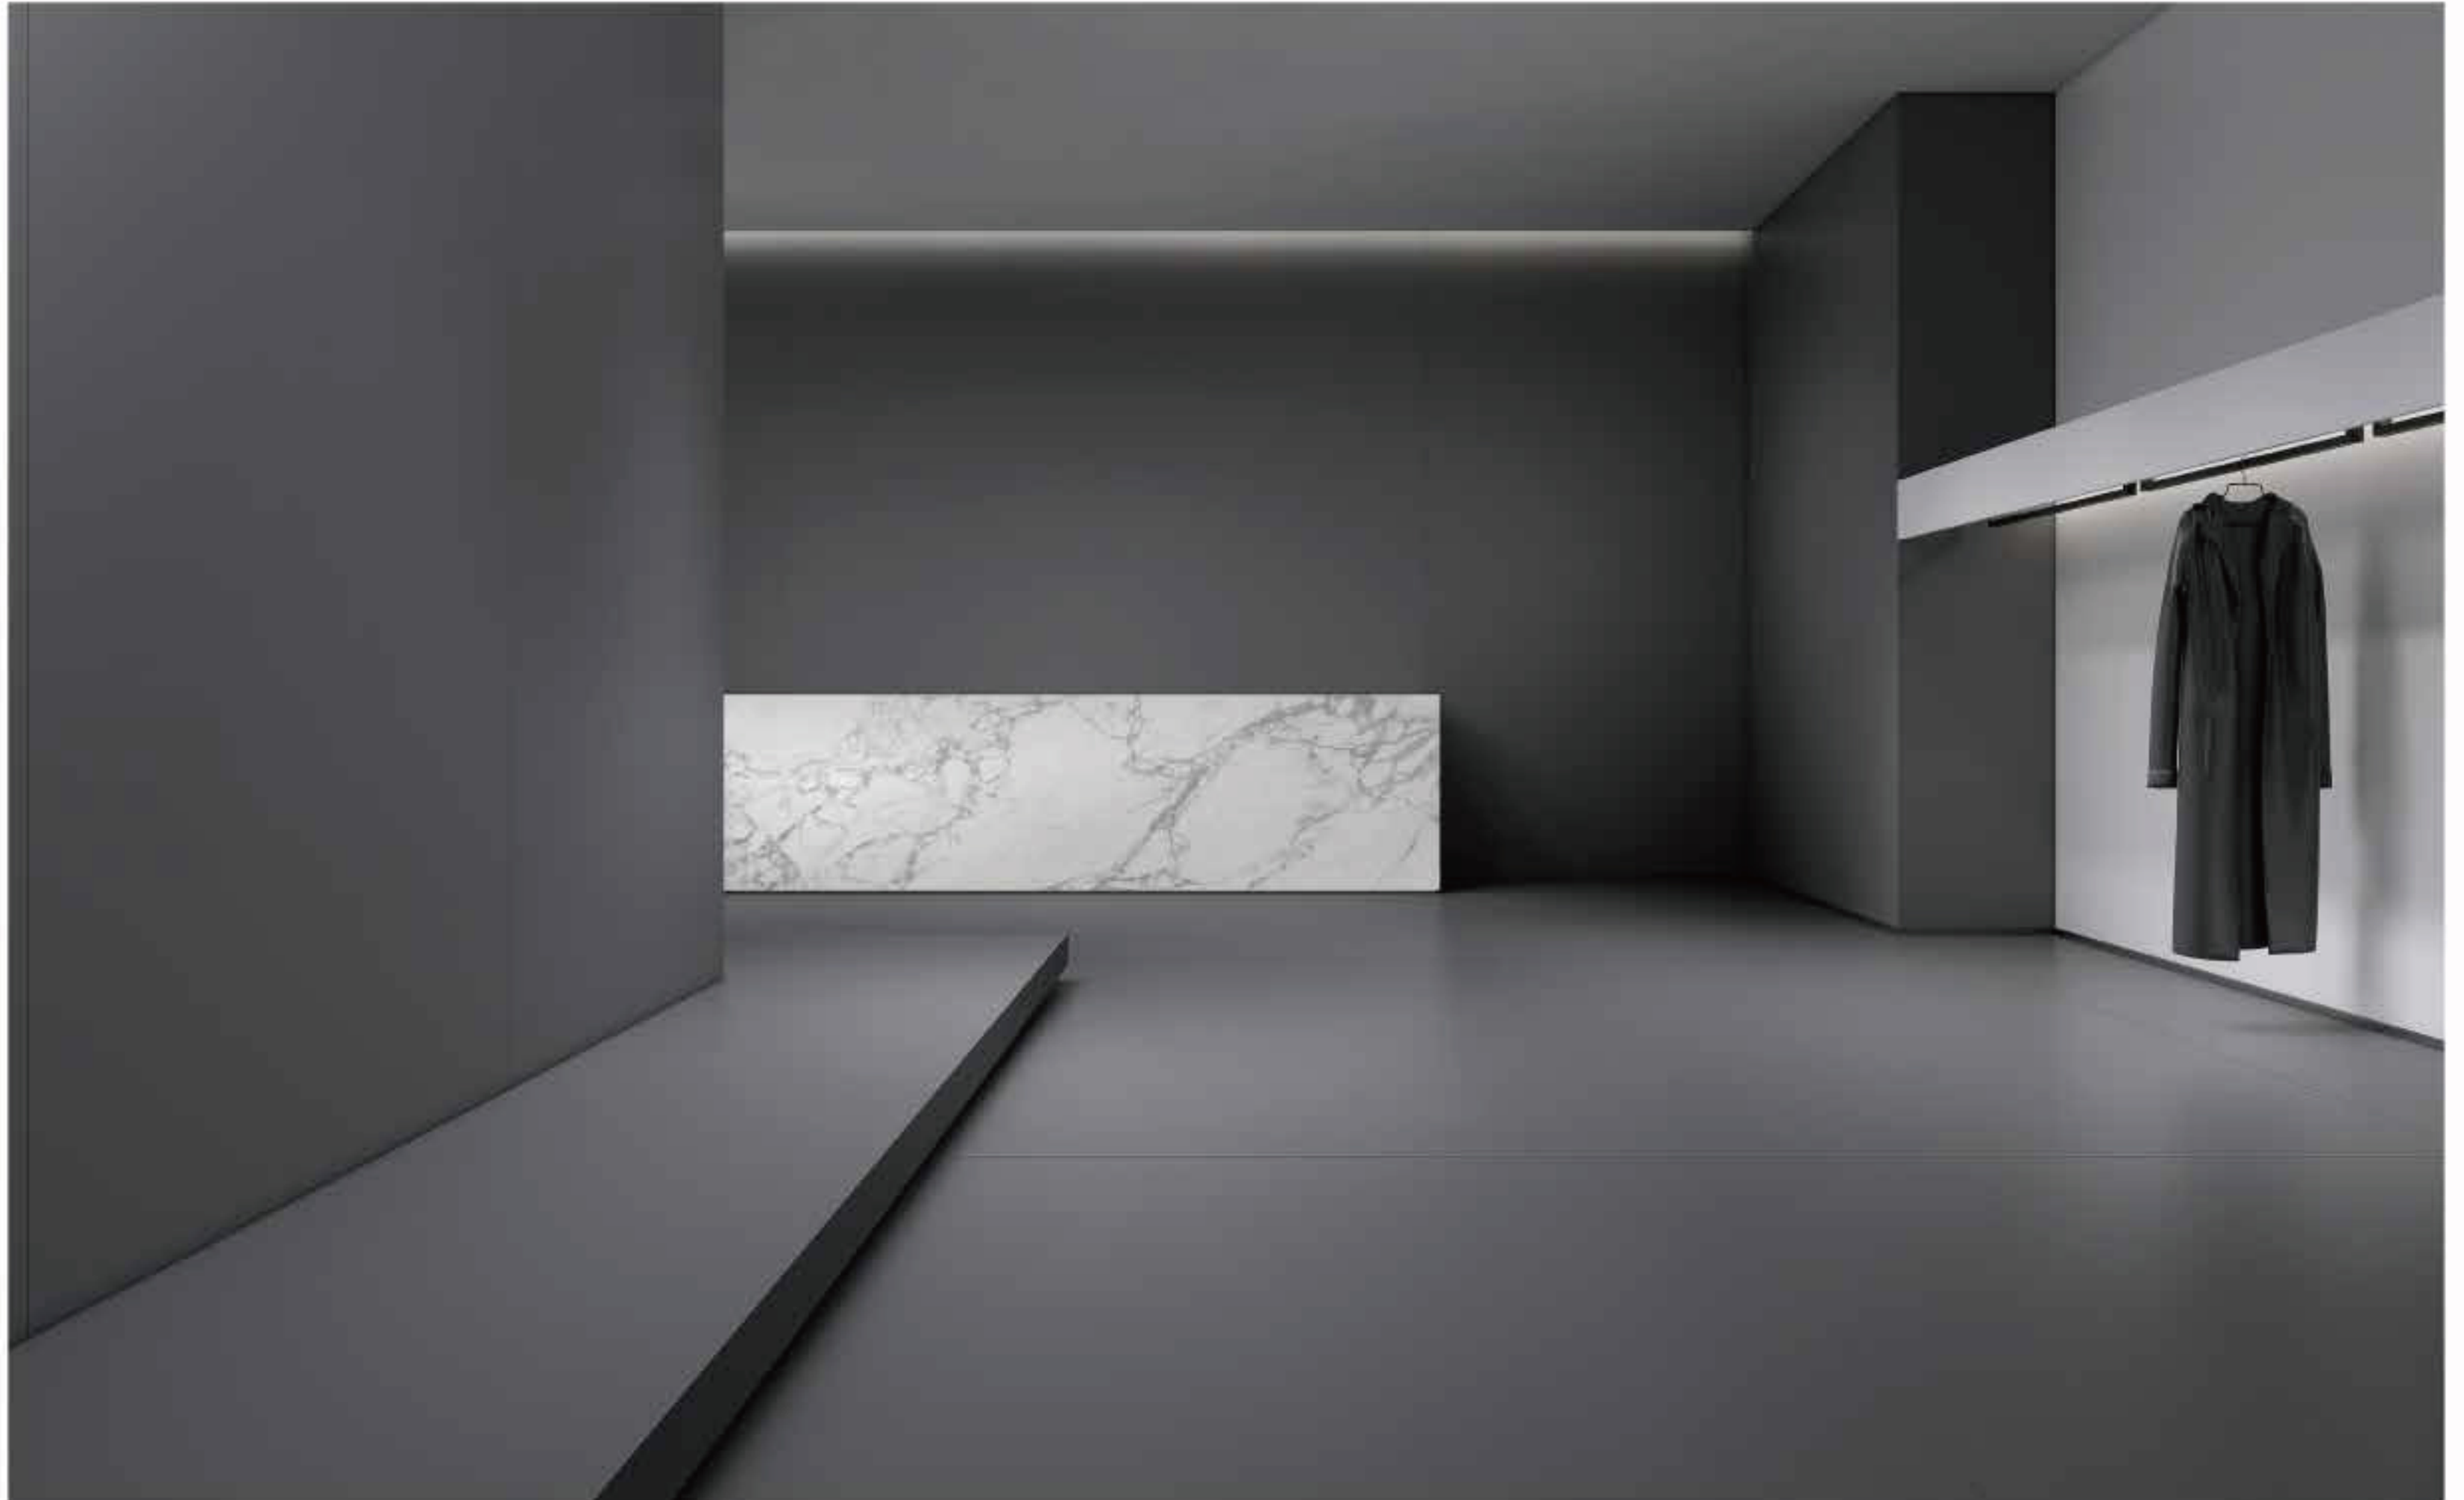



# Technical Features

技术特性

BEYOND ARTS FASHION

| PHYSICAL PROPERTIES             | REGULATION  | REQUIRED VALUE  | MOREROOM AVERAGE VALUES                         |
|---------------------------------|---|---|---|
| DIMENSIONS                      | ISO 10545-2   | ± 0,6% max   length and width                                       | ± 0,1%   length and width                       |
|                                 |   | ± 5% max   Thickness  | ± 5%   Thickness                                |
|                                 |   | ± 0,5% max   Linearity  | ± 0,1%   Linearity                              |
|                                 |   | ± 0,5% max   Wedging  | ± 0,1%   Wedging                                |
|                                 |   | ± 0,5% max   Warpage  | ± 0,2%   Warpage                                |
| WATER ABSORPTION                | ISO 10545-3   | ≤ 0,5 %   | 0.05% - 0.08%                                   |
| MODULS OF RUPTURE (R)           | ISO 10545-3   | ≥ 35 N/mm <sup>2</sup>  | 49 N/mm <sup>2</sup>                            |
| BREAKING STRENGHT (S)           | ISO 10545-4   | < 7,5mm = ≥ 700 N   | Conforms  |
| DEEP ABRASION RESISTANCE        | ISO 10545-6   | max 175 mm <sup>3</sup>   | 140 mm <sup>3</sup>                             |
| COEFFICIENT OF                  | ISO 10545-8   | 9x10 <sup>-6</sup> °C <sup>-1</sup>                                 | 6,5x10 <sup>-6</sup> °C <sup>-1</sup>           |
| LINEAR THERMAL EXPANSION        |   |   |   |
| RESISTANCE TO THERMAL SHOCKS    | ISO 10545-9   | No sample must show alterations to surface                          | Available on request                            |
| FROST RESISTANCE                | ISO 10545-12  | No sample must show alterations to surface                          | Available on request                            |
| RESISTANCE TO CHEMICAL PRODUCTS | ISO 10545-13  | Resistance to household chemicals and pool additives (min. class B) | A   |
|                                 |   | Resistance to acids and alkalis at low concentration                | LB  |
|                                 |   | Resistance to highly concentrated acid and alkaline products        | HB  |
| STAIN RESISTANCE                | ISO 10545-14  | No sample must show alterations to surface                          | Stains removed by hot water (without detergent) |
| RESISTANCE TO LIGHT             | DIN 51094   | No sample must show alterations to surface                          | No change in brightness or colour of samples    |
| FRICITION COEFFICIENT           | BCRA REP CEC 6/81   | 0.40 ≤ μ ≤ 0.74   | >0.4  |
| REACTION TO FIRE                | 96/603/CE   | Not applicable  | A1 – A1FL                                       |
| NOTES                           | *The slip resistance, static or dynamic coefficient of friction values shown in the catalog and in the Safe System table are to be considered purely indicative and not binding. Any specific need must be confirmed by us at the time of the order and in any case always before installation. |   |   |

# Product performance

## 产品性能

Moreroom passes the certifications including ISO 9001 | ISO 50001 | ISO 14001 | EU EMAS | GREENGUARD | CCC | LEED | AEO, etc. From raw materials purchasing, monitoring of the production process, and the delivery of finished products, all the accusations of people, machines, materials, and procedures are strictly controlled in digitization, dramatization, and standardization. With international certification, Moreroom products are more environmental-friendly and healthy, providing people with a safe and methanol-free environment.

Moreroom通过ISO 9001 | ISO 50001 | ISO 14001 | 欧盟EMAS | GREENGUARD | CCC | LEED | AEO认证, 从原料进厂、生产过程监控、成品出厂所有环节的人、机、料、法各指控点都进行批量化、数据化、标准化严格控制, 具备国际权威认证, 产品环保健康, 更加安全, 能够给予人们健康、安全、无甲醇的环境。



|   |   |
|---|---|
|  <p>ULTRA-REALISTIC<br/>超逼真</p>                  |  <p>TOUGHNESS<br/>超强韧性</p>             |
|  <p>6+MOHS HARDNESS<br/>6+级莫氏硬度</p>              |  <p>10+COLOR CHANNELS<br/>10色彩通道</p>   |
|  <p>RICH COLORS &amp;TEXTURE<br/>花色丰富</p>        |  <p>FOOD GRADE SURFACE<br/>食品级表面</p>   |
|  <p>WATERPROOF<br/>抗渗</p>                        |  <p>SCRATCH RESISTANT<br/>耐划刮</p>      |
|  <p>RESISTANT TO HIGH TEMPERATURES<br/>耐高温</p> |  <p>EASY TO CLEAN<br/>易于清洁</p>       |
|  <p>HYGIENIC<br/>卫生</p>                        |  <p>100% NATURAL<br/>100%天然</p>      |
|  <p>RESISTANT TO UV RAYS<br/>防紫外线</p>          |  <p>RECYCLABLE<br/>可循环</p>           |
|  <p>LIGHTWEIGHT<br/>轻盈</p>                     |  <p>RESISTANT TO BENDING<br/>抗弯折</p> |





MOREROOM

·STONE·

Beyond Arts Fashion



# 与我们联系

# Contact Us



FOSHAN MONO BUILDING MATERIAL CO.,LTD.  
MOREROOM STONE CO., LTD.

Marketing Center: No.1 Building, West Area, Green Plaza, No.129  
Jihua West road, Foshan City, Guangdong, China  
Manufacturing Add: No.325 National Highway, Xiadong County,  
Yunfu City, Guangdong, China

---